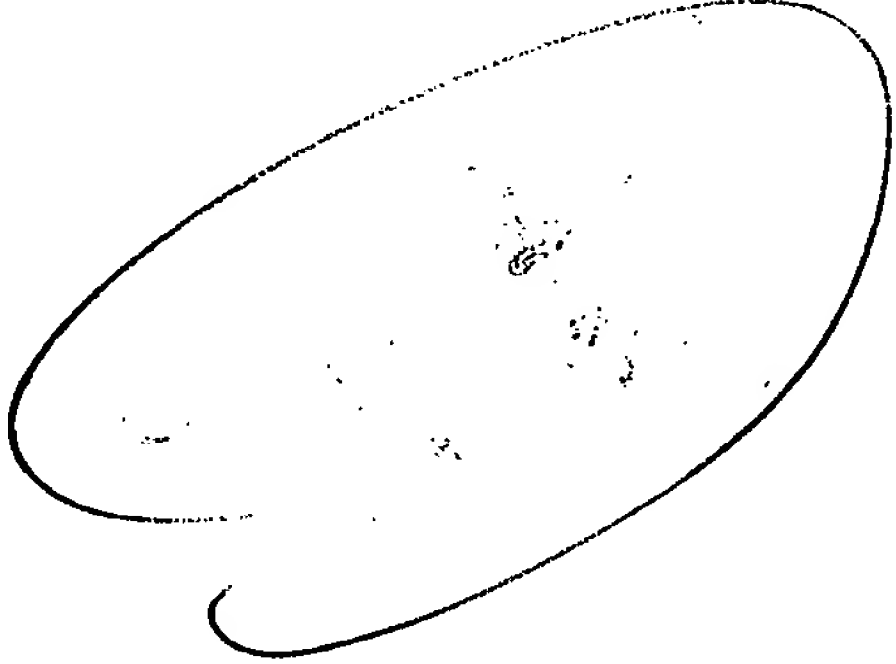


OR


PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : C12Q 1/68, C12N 15/10	A1	(11) International Publication Number: WO 95/25177 (43) International Publication Date: 21 September 1995 (21.09.95)
(21) International Application Number: PCT/GB95/00542 (22) International Filing Date: 14 March 1995 (14.03.95) (30) Priority Data: 9405016.8 15 March 1994 (15.03.94) GB 9502284.4 6 February 1995 (06.02.95) GB (71) Applicant (for all designated States except US): SCIENTIFIC GENERIC LIMITED [GB/GB]; King's Court, Kirkwood Road, Cambridge CB4 2PF (GB). (72) Inventor; and (75) Inventor/Applicant (for US only): PURVIS, Duncan, Ross [GB/GB]; 22 Frobisher Close, Hartford, Huntingdon PE18 7RS (GB). (74) Agent: SMART, Peter, John; W.H. Beck, Greener & Co., 7 Stone Buildings, Lincoln's Inn, London WC2A 3SZ (GB).		(81) Designated States: CN, JP, KR, SG, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published With international search report. 

(54) Title: ELECTROCHEMICAL DENATURATION OF DOUBLE-STRANDED NUCLEIC ACID

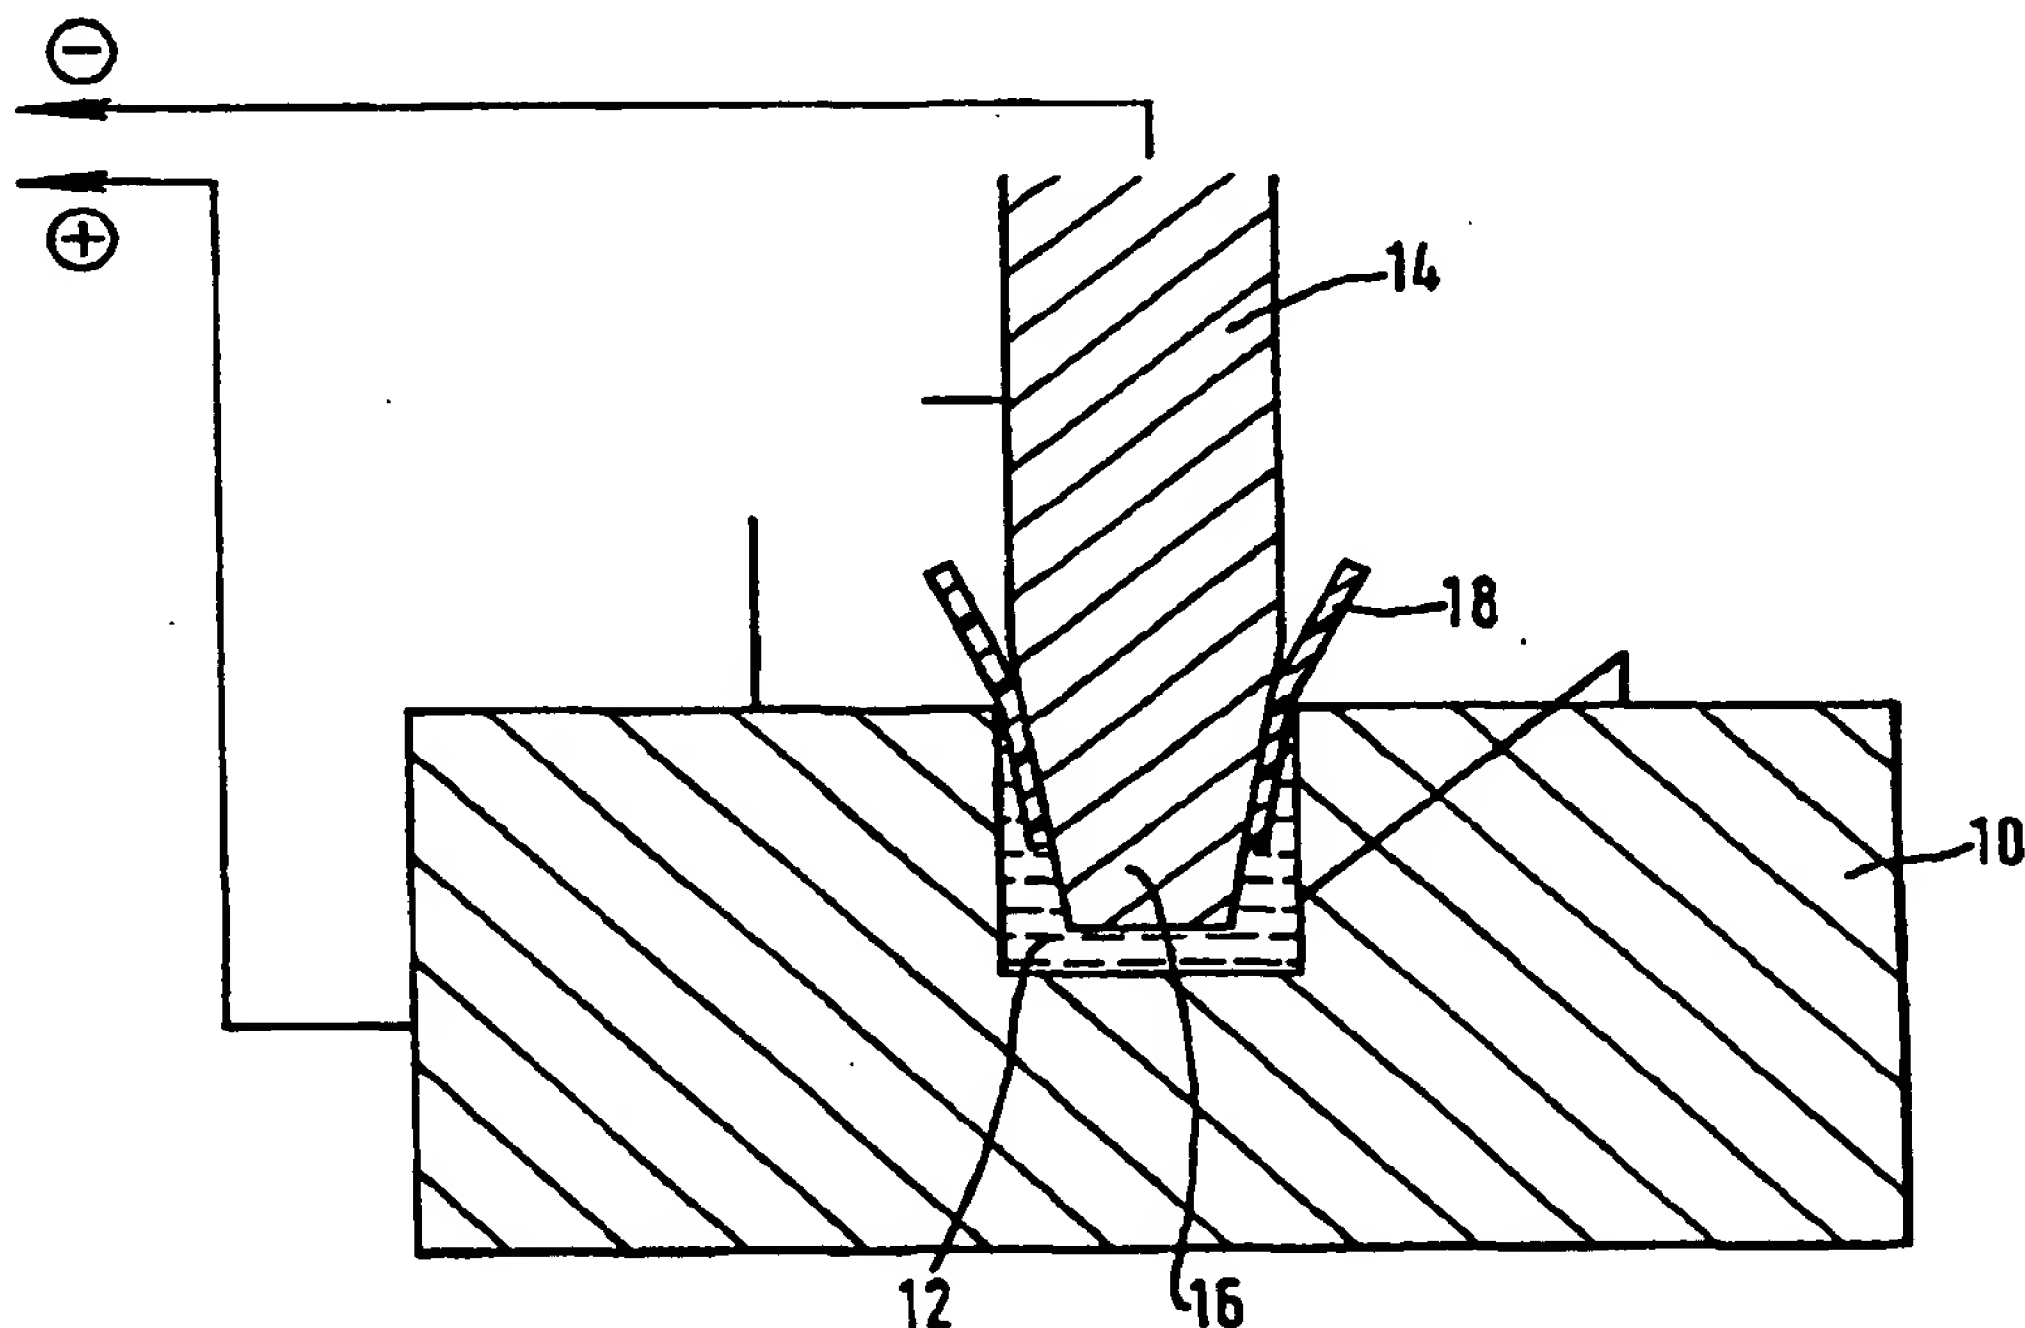

(57) Abstract

Double stranded nucleic acid is denatured by subjecting a solution thereof to a voltage applied between electrodes spaced by no more than 1.5 mm in a time not previously achievable in electrochemical denaturation. PCR is practised isothermally by periodic application of voltage to produce denaturation. Electrochemical cells and kits for use in the process are provided.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

-1-

ELECTROCHEMICAL DENATURATION OF DOUBLE-STRANDED
NUCLEIC ACID

5 This invention relates to processes for the treatment of nucleic acid material in order to effect a complete or partial change from double-stranded form to single-stranded form and to processes of amplifying or detecting nucleic acids involving such denaturation processes.

10 Double-stranded DNA (deoxyribonucleic acid) and DNA/RNA (ribonucleic acid) and RNA/RNA complexes in the familiar double helical configuration are stable molecules that, in vitro, require aggressive conditions to separate the complementary strands of the nucleic acid. Known methods that
15 are commonly employed for strand separation require the use of high temperatures of at least 60°C and often 100°C for extended periods of ten minutes or more or use an alkaline pH of 11 or higher. Other methods include the use of helicase enzymes such as Rep protein of E.coli that can catalyse the
20 unwinding of the DNA in an unknown way, or binding proteins such as 32-protein of E.coli phage T4 that act to stabilise the single-stranded form of DNA. The denatured single stranded DNA produced by the known processes of heat or alkali treatment is used commonly for hybridisation studies or is
25 subjected to amplification cycles.

 Such separation is a prerequisite of a number of protocols involving the in vitro manipulation of nucleic acids, one example of which is a reaction that produces multiple copies of target sequences of DNA and which employs
30 a heat-stable polymerase enzyme (US Patent No. 4683202, K.B. Mullis et al). This development, known as the polymerase chain reaction (PCR), is of significant commercial importance and strand separation is normally effected by heating the sample to approximately 95°C. The removal of the need to heat
35 the sample would provide a number of benefits. For example, it allows the design of compact and readily controllable

-2-

apparatus, and the use of higher fidelity mesophilic enzymes.

WO 92/04470 discloses a process whereby nucleic acid strands are separated by the application of an electric field. The advantages of the electrical method are discussed in greater detail, along with the method's application in amplification reactions such as PCR and ligase chain reaction. Forms of electrochemical cells for carrying out the reaction are described and also the use of "promoter" compounds that enhance the efficiency of denaturation.

Prior to WO92/04470, a number of other workers had described denaturation of DNA in electrochemical cells. However, in none of these cases was single-stranded product left free in solution in useful quantities. Rather, DNA appears to have become irreversibly bound to the surface of the electrode, in which condition it is not available for further participation in processes such as PCR. In the method of electrical denaturation described in WO92/04470, single strands accumulate in solution and their utility and integrity is confirmed by subsequently performing PCR.

In WO92/04470 electrical denaturation of DNA was carried out using an electrode comprising a central rod of glassy carbon encased in a teflon sleeve except at its end. The working electrode was of platinum mesh lying against the teflon sleeve. A calomel reference electrode was used, situated in a side chamber which was connected to the main cell by a capillary tube (see Stanley C.J. et al, J. Immunol. Meth. [1988], 112, 153-161). Using this apparatus the most rapid denaturation was achieved in 15 minutes with the working electrode at a potential of -1V with respect to the reference. The presence of NaCl in the reaction delayed denaturation.

In WO92/04470, a PCR reaction is conducted in which there are repeated denaturation operations conducted using the electro-chemical cell described with intervening amplification stages. The denaturation stages are each conducted for a period of five minutes or longer, and the total time for the PCR reaction is therefore very extended. Furthermore, the

-3-

conditions under which the PCR reaction was conducted electrochemical in WO92/00470 differ from those of the conventional PCR process in that it was not found possible to use a conventional PCR buffer system. In order to obtain
5 denaturation, it was necessary to conduct the process at a much lower ionic strength than would be consistent with such a buffer system. Excluding the promoter methyl viologen, the process was basically conducted in distilled water.

It has now been discovered that it is now possible to
10 conduct a denaturation electrochemically considerably faster than is disclosed in WO92/04470 and to conduct an amplification procedure much faster than is disclosed there.

Although the spacing between the two working electrodes in WO92/04470 is not explicitly stated, it was in fact several
15 millimetres.

Accordingly, the present invention provides a process for denaturing double-stranded nucleic acid which comprises subjecting a solution containing said nucleic acid to a voltage applied between electrodes under conditions such as
20 to convert at least a portion of said nucleic acid to a wholly or partially single-stranded form in the solution, wherein said electrodes approach to within 1.5 mm of one another in said solution. Preferably, the electrodes approach more closely, e.g. within 1 mm or more preferably 0.5 mm of one
25 another. Ideally, the electrodes are adjusted to be spaced by as little as possible whilst ensuring that they do not contact one another to produce a short circuit.

It is preferred to apply a voltage difference of from 0.5 to 3 volts between the electrodes. Voltage differences above
30 3 volts seem to inhibit denaturation although the mechanism involved here is presently unknown.

Preferably, the process is conducted at a voltage of 1.5 to 2.5 volts measured as a voltage difference between the electrodes.

35 Preferably, where the electrodes most closely approach one another, one or both of the electrodes is pointed. Such

an electrode may be provided with a single point or a plurality of points. There appears to be some inter-relationship between the ideal voltage applied and the shape of the electrode and it may be that there is a preferred or
5 ideal field gradient at the point of the electrode which can be achieved by adjustment of the voltage to suit the sharpness of the part of the electrode at which the denaturation takes place. Optionally, one can conduct the denaturation using a constant current supply rather than a regulated voltage and
10 this may serve to compensate for variations in the geometrical set-up of the electrodes between different denaturation operations.

Where a constant current regime is employed, it will generally be preferable to use a current of from 80 to 160 μA ,
15 e.g. about 100 to 125 μA .

As described in WO92/04470, one may employ a promoter compound such as methyl viologen to produce more rapid denaturation. Other promoters are described in WO93/15224, i.e. multivalent cations such as magnesium. Other multi-
20 valent cations which are effective and which can be used include lanthanum (La^{3+}). The cations used as the promoters may include inorganic cations complexed with inorganic or organic ligands, e.g. $\text{Pt}(\text{NH}_3)_6^{4+}$ and $\text{Cr}(\text{NH}_3)_6^{2+}$.

The promoter may be any inorganic or organic molecule
25 which increases the rate of extent of denaturation of the double helix. It should be soluble in the chosen reaction medium. It preferably does not affect or interfere with DNA or other materials such as enzymes or oligonucleotide probes which may be present in the solution. Alternatively, the
30 promoter may be immobilised to or included in material from which the electrode is constructed.

The promoter may be a water-soluble compound of the bipyridyl series, especially a viologen such as methyl-
viologen or a salt thereof. Whilst the mechanism of operation
35 of such promoters is presently not known with certainty, it is believed that the positively charged viologen molecules

-5-

interact between the negatively charged nucleic acid such as DNA and the negatively charged cathode to reduce electrostatic repulsion therebetween and hence to promote the approach of the DNA to the electrode surface where the electrical field is at its strongest. Accordingly, we prefer to employ as promoters compounds having spaced positively charged centres, e.g. bipolar positively charged compounds. Preferably the spacing between the positively charged centres is similar to that in viologens. Other suitable viologens include ethyl-
10 viologen, isopropyl viologen and benzyl viologen.

Optionally, the process may be conducted using a three electrode system of the kind described in WO92/04470 but generally it is preferred that the volume of solution employed according to this invention is small e.g. 1 ml or less, preferably very small e.g. 100 μ l or less, e.g. about 25 μ l to
15 40 μ l. When using very small reaction volumes of this kind, it will generally not be practical to use a three electrode system.

The process may be carried out at ambient temperatures or if desired at temperatures up to adjacent the pre-melting temperature of the nucleic acid. The process may be carried out at a pH of from 3 to 10, conveniently about 7. Generally, more rapid denaturation is obtained at lower pH. For some purposes therefore a pH somewhat below neutral e.g. about pH
20 5.5 may be preferred. The nucleic acid may be dissolved in an aqueous solution containing a buffer whose nature and ionic strength are such as not to interfere with the strand separation process.

Preferably, the solution contains a buffer at a concentration at least 10 mM, e.g. about 25 mM. Optionally, the solution may contain further salts such as magnesium chloride and sodium chloride. Preferably, the reaction is conducted in a buffer of the kind used in PCR or in LCR procedures.
30

Preferably therefore the ionic strength of the solution is above 20 mM, e.g. 25 to 50 mM.
35

The denaturing process according to the invention may be incorporated as a step in a number of more complex processes, e.g. procedures involving the analysis and/or the amplification of nucleic acid. Some examples of such processes are described below.

We have found that by virtue of the superior cell design described above, it is possible to achieve denaturation much more quickly than according to the teachings of WO92/04470 and even in the presence of materials such as PCR buffers which would prevent denaturation or extend denaturation times unreasonably in the apparatus described in WO92/04470. Making use of this shortened time, it is now possible to practice a process of denaturation which is brought to a conclusion within less than 3 minutes e.g. from 1 to 2 minutes or less.

This makes it possible to practice a process of repeated denaturation of double-stranded nucleic acid wherein the nucleic acid is denatured by a process as described above in which the voltage is applied as sequence of repeated pulses having a duration of up to 2 minutes, preferably up to only 1 minute. Between pulses, the voltage may be turned off or reversed for a period which is preferably equal to the period for which the voltage is applied. It is possible to employ pulses of considerably higher frequencies than described above, e.g. from 1 to 100 Hz. Depending upon the purpose for which the denaturation is being conducted, it may not be necessary to achieve any substantial amount of conversion of double-stranded to single-stranded nucleic acid in each denaturation cycle. It may be sufficiently merely to initiate denaturation electro-chemically. For instance, in an amplification procedure, if sufficient denaturation occurs to allow binding of a primer, the extension of the primer by nuclease may be relied upon to displace the unprimed strand of the original nucleic acid from its binding partner over the remainder of the length of the nucleic acid.

Taking advantage of the increased rate of denaturation now obtainable, the invention provides a process of amplifying

-7-

a target sequence of nucleic acid comprising hybridisation, amplification and denaturation of nucleic acid wherein said denaturation is conducted by subjecting a solution containing said nucleic acid to a voltage applied between electrodes for
5 a period of up to 2 minutes under conditions such as to convert at least a portion of the nucleic acid to a wholly or partially single-stranded form in the solution. Preferably, the electrode configuration used in such a process is as described above. Preferably, the voltage is applied as a
10 repeating pulse having a duration of up to 2 minutes but preferably shorter, e.g. up to 1 minute or even much shorter, e.g. at 1 to 100 Hz.

Preferably, the amplification procedure is PCR or LCR.

Thus the present invention includes a process for
15 replicating a nucleic acid which comprises: separating the strands of a sample double-stranded nucleic acid in solution under the influence of an electrical voltage applied to the solution from an electrode: hybridising the separated strands of the nucleic acid with at least one oligonucleotide primer
20 that hybridises with at least one of the strands of the denatured nucleic acid; synthesising an extension product of the or each primer which is sufficiently complementary to the respective strand of the nucleic acid to hybridise therewith; and separating the or each extension product from the nucleic
25 acid strand with which it is hybridised to obtain the extension product.

In such a polymerase mediated replication procedure, e.g. a polymerase chain reaction procedure, it may not be necessary in all cases to carry out denaturation to the point of
30 producing wholly single-stranded molecules of nucleic acid. It may be sufficient to produce a sufficient local and/or temporary weakening or separation of the double helix in the primer hybridisation site to allow the primer to bind to its target. Once the primer is in position on a first of the
35 target strands, rehybridisation of the target strands in the primer region will be prevented and the other target strand

may be progressively displaced by extension of the primer or by further temporary weakening or separation processes.

Preferably, the said amplification process further comprises repeating the procedure defined above cyclicly, e.g. for more than 10 cycles, e.g. up to 20 or 30 cycles. In the amplification process the hybridisation step is preferably carried out using two primers which are complementary to different strands of the nucleic acid.

The denaturation to obtain the extension products as well as the original denaturing of the target nucleic acid is preferably carried out by applying to the solution of the nucleic acid the voltage from the electrodes.

The process may be a standard or classical PCR process for amplifying at least one specific nucleic acid sequence contained in a nucleic acid or a mixture of nucleic acids wherein each nucleic acid consists of two separate complementary strands, of equal or unequal length, which process comprises:

- (a) treating the strands with two oligonucleotide primers, for each different specific sequence being applied, under conditions such that for each different sequence being amplified an extension product of each primer is synthesised which is complementary to each nucleic acid strand, wherein said primers are selected so as to be substantially complementary to different strands of each specific sequence such that the extension product synthesised from one primer, when it is separated from its complement, can serve as a template for synthesis of the extension product of the other primer;
- (b) separating the primer extension products from the templates on which they were synthesised to produce single-stranded molecules by applying the voltage from the electrode to the reaction mixture; and
- (c) treating the single-stranded molecules generated from step (b) with the primers of step (a) under conditions such that a primer extension product is synthesised

using each of the single strands produced in step (b) as a template.

Alternatively, the process may be any variant of the classical or standard PCR process, e.g. the so-called "inverted" or "inverse" PCR process or the "anchored" PCR process.

The invention therefore includes an amplification process as described above in which a primer is hybridised to a circular nucleic acid and is extended to form a duplex which is denatured by the denaturing process of the invention, the amplification process optionally being repeated through one or more additional cycles.

The process of the invention is applicable to the ligase chain reaction. Accordingly, the invention includes a process for amplifying a target nucleic acid comprising the steps of:

- (a) providing nucleic acid of a sample as single-stranded nucleic acid;
- (b) providing in the sample at least four nucleic acid probes, wherein:
 - i) the first and second said probes are primary probes, and the third and fourth of said probes are secondary nucleic acid probes;
 - ii) the first probe is a single strand capable of hybridising to a first segment of a primary strand of the target nucleic acid;
 - iii) the second probe is a single strand capable of hybridising to a second segment of said primary strand of the target nucleic acid;
 - iv) the 5' end of the first segment of said primary strand of the target is positioned relative to the 3' end of the second segment of said primary strand of the target to enable joining of the 3' end of the first probe to the 5' end of the second probe, when said probes are hybridised to said primary strand of said target nucleic acid;

-10-

- v) the third probe is capable of hybridising to the first probe; and
- iv) the fourth probe is capable of hybridising to the second probe; and
- 5 (c) repeatedly or continuously:
 - i) hybridising said probes with nucleic acid in said sample;
 - ii) ligating hybridised probes to form reorganised fused probe sequences; and
 - 10 iii) denaturing DNA in said sample by applying a voltage from an electrode configuration as described to the reaction mixture.

The electrochemical DNA amplification technique can be used analytically to detect and analyse a very small sample
15 of DNA e.g a single copy gene in an animal cell or a single cell of a bacterium.

The temperature at which the process is carried out may be chosen to suit whichever enzyme is used. Thus where Taq is used as polymerase, a temperature of 55 to 68°C is
20 preferred. If Klenow polymerase is used, ambient temperature will be suitable. It may be desirable to employ known protein stabilisation techniques to avoid electrical damage to the polymerase, especially where a mesophilic polymerase is used.

The invention includes a process for detecting the
25 presence or absence of a predetermined nucleic acid sequence in a sample which comprises: denaturing a sample double-stranded nucleic acid by means of a voltage applied to the sample in a solution by means of electrodes spaced as described above; hybridising the denatured nucleic acid with
30 an oligonucleotide probe for the sequence; and determining whether the said hybridisation has occurred.

Thus, the invented process has application in DNA and RNA hybridisation where a specific gene sequence is to be identified e.g. specific to a particular organism or specific
35 to a particular hereditary disease of which sickle cell anaemia is an example. To detect a specific sequence it is

-11-

first necessary to prepare a sample of DNA, preferably of purified DNA, means for which are known, which is in native double-stranded form. It is then necessary to convert the double-stranded DNA to single-stranded form before a hybridisation step with a labelled nucleotide probe which has a complementary sequence to the DNA sample can take place. The denaturation process of the invention can be used for this purpose in a preferred manner by carrying out the following steps:

- 10 - denaturing a sample of DNA by applying a voltage by means of an electrode configuration as described to the sample DNA with optionally a promoter in solution or bound to or part of the structure of the electrode;
- hybridising the denatured DNA with a directly labelled or indirectly labelled nucleotide probe complementary to the sequence of interest; and
- 15 - determining whether the hybridisation has occurred, which determination may be by detecting the presence of the probe, the probe being directly radio-labelled, fluorescent labelled, chemiluminescent labelled or enzyme-labelled or being an indirectly labelled probe which carries biotin for example to which a labelled avidin or avidin type molecule can be bound later.

In a typical DNA probe assay it is customary to immobilise the sample DNA to a membrane surface which may be composed of neutral or charged nylon or nitrocellulose. The immobilisation is achieved by charge interactions or by baking the membrane containing DNA in an oven. The sample DNA can be heated to high temperature to ensure conversion to single-stranded form before binding to the membrane or it can be treated with alkali once on the membrane to ensure conversion to the single-stranded form. The disadvantages of such methods are:

- heating to high temperature to create single-stranded DNA can cause damage to the sample DNA itself.

-12-

- the use of alkali requires an additional step of neutralisation before hybridisation with the labelled probe can take place.

One improved method for carrying out DNA probe hybridisation assays is the so-called "sandwich" technique where a specific oligonucleotide is immobilised on a surface. The surface having the specific oligonucleotide thereon is then hybridised with a solution containing the target DNA in a single-stranded form, after which a second labelled oligonucleotide is then added which also hybridises to the target DNA. The surface is then washed to remove unbound labelled oligonucleotide, after which any label which has become bound to target DNA on the surface can be detected later.

15 This procedure can be simplified by using the denaturing process of the invention to denature the double-stranded DNA into the required single-stranded DNA. The working electrode, counter-electrode and optionally a reference electrode and/or a promoter can be incorporated into a test surface or a well in which the DNA probe assay is to be carried out. The DNA sample and oligonucleotide probes can then be added and the voltage applied to denature the DNA. The resulting single-stranded DNA is hybridised with the specific oligonucleotide immobilised on the surface after which the remaining stages of a sandwich assay are carried out. All the above steps can take place without a need for high temperatures or addition of alkali reagents as in the conventional process.

30 The invention includes an electrochemical cell for use in the denaturation of nucleic acid comprising a well having an electrically conductive inner surface constituting a first electrode, and a second electrode dipping into said well and reaching to close proximity to the floor of said well. Preferably, the well is formed in a body of conductive material constituting the second electrode. Both the well and 35 the second electrode may be of conductive carbon such as graphite.

-13-

The invention further includes a kit for use in a nucleic acid assay or amplification comprising an electro-chemical cell of this kind and at least one of a nucleic acid for denaturation, an oligonucleic acid, one or more nucleotides, a polymerase, a ligase and/or a buffer solution.

5 The invention will be further described and illustrated with reference to the accompanying drawing which is a cross-sectional view through a cell for use in accordance with the invention.

10 The cell illustrated comprises a graphite block 10, containing a 4 mm diameter well 12 on its upper surface, constituting a first electrode. A second electrode formed from a 2 mm diameter graphite rod 14 having a tapering end portion 16 is pressed into the well through an insulating collar of plastics material 18. The rod is adjusted downwards in the well until it forms a short circuit and is then lifted back by as little as possible to open the circuit again. The capacity for liquid for the cell is approximately 25 μ l. A DC voltage is applied to the apparatus with the well 20 being made positive with respect to the rod by preferably 1.6 to 2.4 volts.

Although the rod electrode shown in Figure 1 is blunt ended, it provides a sharp edge between its flat end and its tapering frustoconical surface. An optional alternative 25 configuration is for the rod to be sharpened to a point. This may be achieved by using a conventional pencil sharpener. The resulting electrode may be further smoothed using a blade or abrasive. Using such a pointed electrode, the capacity for liquid of the well is increased to 40 μ l.

30 Multiple processes according to the invention may be carried out simultaneously in apparatus containing a multiplicity of sample receiving wells each provided with a respective electrode pair, one electrode in each case optionally being the well itself. In a preferred form, for 35 such apparatus a block containing the wells has a liftable lid with electrodes depending therefrom into the wells. Each well

-14-

may have a pair of electrodes on the lid in various possible electrode conformations such as parallel rods, parallel plates, optionally of mesh, or coaxial hollow cylinders, again optionally of mesh. Alternatively, single electrodes may be provided on the lid for each well and the block containing the wells may be conductive and may serve as a common second electrode. The block of wells may also contain respective electrodes for each well.

The lid may comprise a flat plate portion bearing the electrode or electrodes for each well and a separate backing member bearing electrical connections and circuitry which connects up the electrodes when the two parts are assembled. A single electrical supply to the unit may be split by said circuitry and supplied in a controlled manner to the electrodes such that each electrode is controlled, e.g. to a constant voltage or constant current. The plate portion carrying the electrode array may thereby be replaceable without replacement of the control circuitry and may be made disposable. The plate portion and the backing member may be aligned with one another on assembly by locating pins and apertures and may similarly be aligned with the block containing the wells, which also may be disposable.

The following examples illustrate the use of the apparatus described above and methods according to the invention in comparison to techniques described in WO92/04470.

Example 1

Denaturation of DNA was carried out in the cell shown in Figure 1, modified by the use of a pointed electrode 14, using a constant voltage of 2.4 V. Denaturation of 40 μ l of calf thymus DNA (12 μ g/ml) in 1 mM methyl viologen was completed in 1 to 2 minutes.

Comparative Example 1

Using the three electrode electrical system described in WO92/04470, DNA was denatured using -IV at the working

-15-

electrode with respect to the calomel reference electrode (~2.4V). Denaturation of 1 ml of calf thymus DNA (4 μ g/ml) in 1 mM methyl viologen was completed in about 25 minutes.

5 Example 2

Denaturation of calf thymus DNA was carried out using a constant voltage of 2.4 V between the electrode of the cell of Figure 1, modified by the use of a pointed electrode 14. Denaturation of 40 μ l DNA (20 μ g/ml) in 25 mM KPO_4 , pH 6.0,
10 1 mM methyl viologen was completed in 1 to 2 minutes.

Comparative Example 2

Using the three electrodes of WO92/04470 DNA was denatured using -IV at the working electrode with respect to
15 the calomel reference electrode (~2.4V). Denaturation of 1 ml calf thymus DNA (4 μ g/ml) in 25 mM Tris, pH 7.5, 1 mM methyl viologen, required more than 180 minutes.

Whilst the invention has been described above in terms
20 of the preferred embodiments illustrated by the examples, many modifications and variations thereof are possible within the scope of the invention.

-16-

CLAIMS

1. A process for denaturing double-stranded nucleic acid
5 which comprises subjecting a solution containing said nucleic acid to a voltage applied between electrodes under conditions such as to convert at least a portion of said nucleic acid to a wholly or partially single stranded form in the solution, wherein said electrodes approach to within 1.5mm of one
10 another in said solution.
2. A process as claimed in claim 1, wherein the electrodes approach to within 1 mm of one another in said solution.
- 15 3. A process as claimed in claim 1, wherein the electrodes approach to within 0.5 mm of one another in said solution.
4. A process as claimed in any preceding claim, wherein a voltage of from 0.5 to 3 volts is applied between said
20 electrodes.
5. A process as claimed in claim 4, wherein a voltage of from 1.5 to 2.5 volts is applied between said electrodes.
- 25 6. A process as claimed in any preceding claim, wherein the solution contains a promoter which assists said denaturation.
7. A process as claimed in claim 6, wherein said promoter is methyl viologen or a salt thereof, or is a multivalent
30 inorganic cation.
8. A process as claimed in claim 7, wherein said promoter is magnesium or lanthanum ions.
- 35 9. A process as claimed in any preceding claim, wherein where the electrodes most closely approach one another, one

-17-

or both of the electrodes is pointed.

10. A process of repeated denaturation of double stranded nucleic acid, wherein the nucleic acid is denatured by a process as claimed in any one of the preceding claims in which
5 said voltage is applied as a repeating pulse having a duration of up to 2 minutes.

11. A process of repeated denaturation as claimed in claim
10 11, wherein said voltage is applied as a repeating pulse having a duration of up to 1 minute.

12. A process of repeated denaturation as claimed in claim
15 11 or claim 12, wherein between said pulses the voltage is turned off or reversed for a period equal to the period for which the voltage is applied.

13. A process of repeated denaturation as claimed in claim
20 12, wherein said voltage is applied as pulses at a frequency of from 1 to 100 Hz.

14. A process of amplifying a target sequence of nucleic acid comprising hybridisation, amplification and denaturation of nucleic acid wherein said denaturation is conducted by
25 subjecting a solution containing said nucleic acid to a voltage applied between electrodes for a period of up to 2 minutes under conditions such as to convert at least a portion of said nucleic acid to a wholly or partially single stranded form in the solution.

30 15. A process of amplifying a target sequence of nucleic acid as claimed in claim 14, wherein said electrodes approach to within 1.5mm of one another in said solution.

35 16. A process of amplifying a target sequence of nucleic acid as claimed in claim 14 or claim 15, wherein said voltage is

-18-

applied as a repeating pulse having a duration of up to 2 minutes.

17. A process of amplifying a target sequence of nucleic acid
5 as claimed in claim 14 or claim 15, wherein said voltage is applied as a repeating pulse having a duration of up to 1 minute.


18. A process of amplifying a target sequence as claimed in
10 any one of claims 14 to 17, which is a PCR or LCR amplification.

19. An electrochemical cell for use in the denaturation of
nucleic acid comprising a well having an electrically
15 conductive inner surface constituting a first electrode and a second electrode dipping into said well and reaching to close proximity to the floor of said well.

20. A kit for use in a nucleic acid assay or amplification,
20 comprising an electrochemical cell as claimed in claim 19, and at least one of:

a nucleic acid for denaturation;
an oligo-nucleic acid ;
25 one or more nucleotides;
a polymerase;
a ligase; and
a buffer solution.

1 / 1

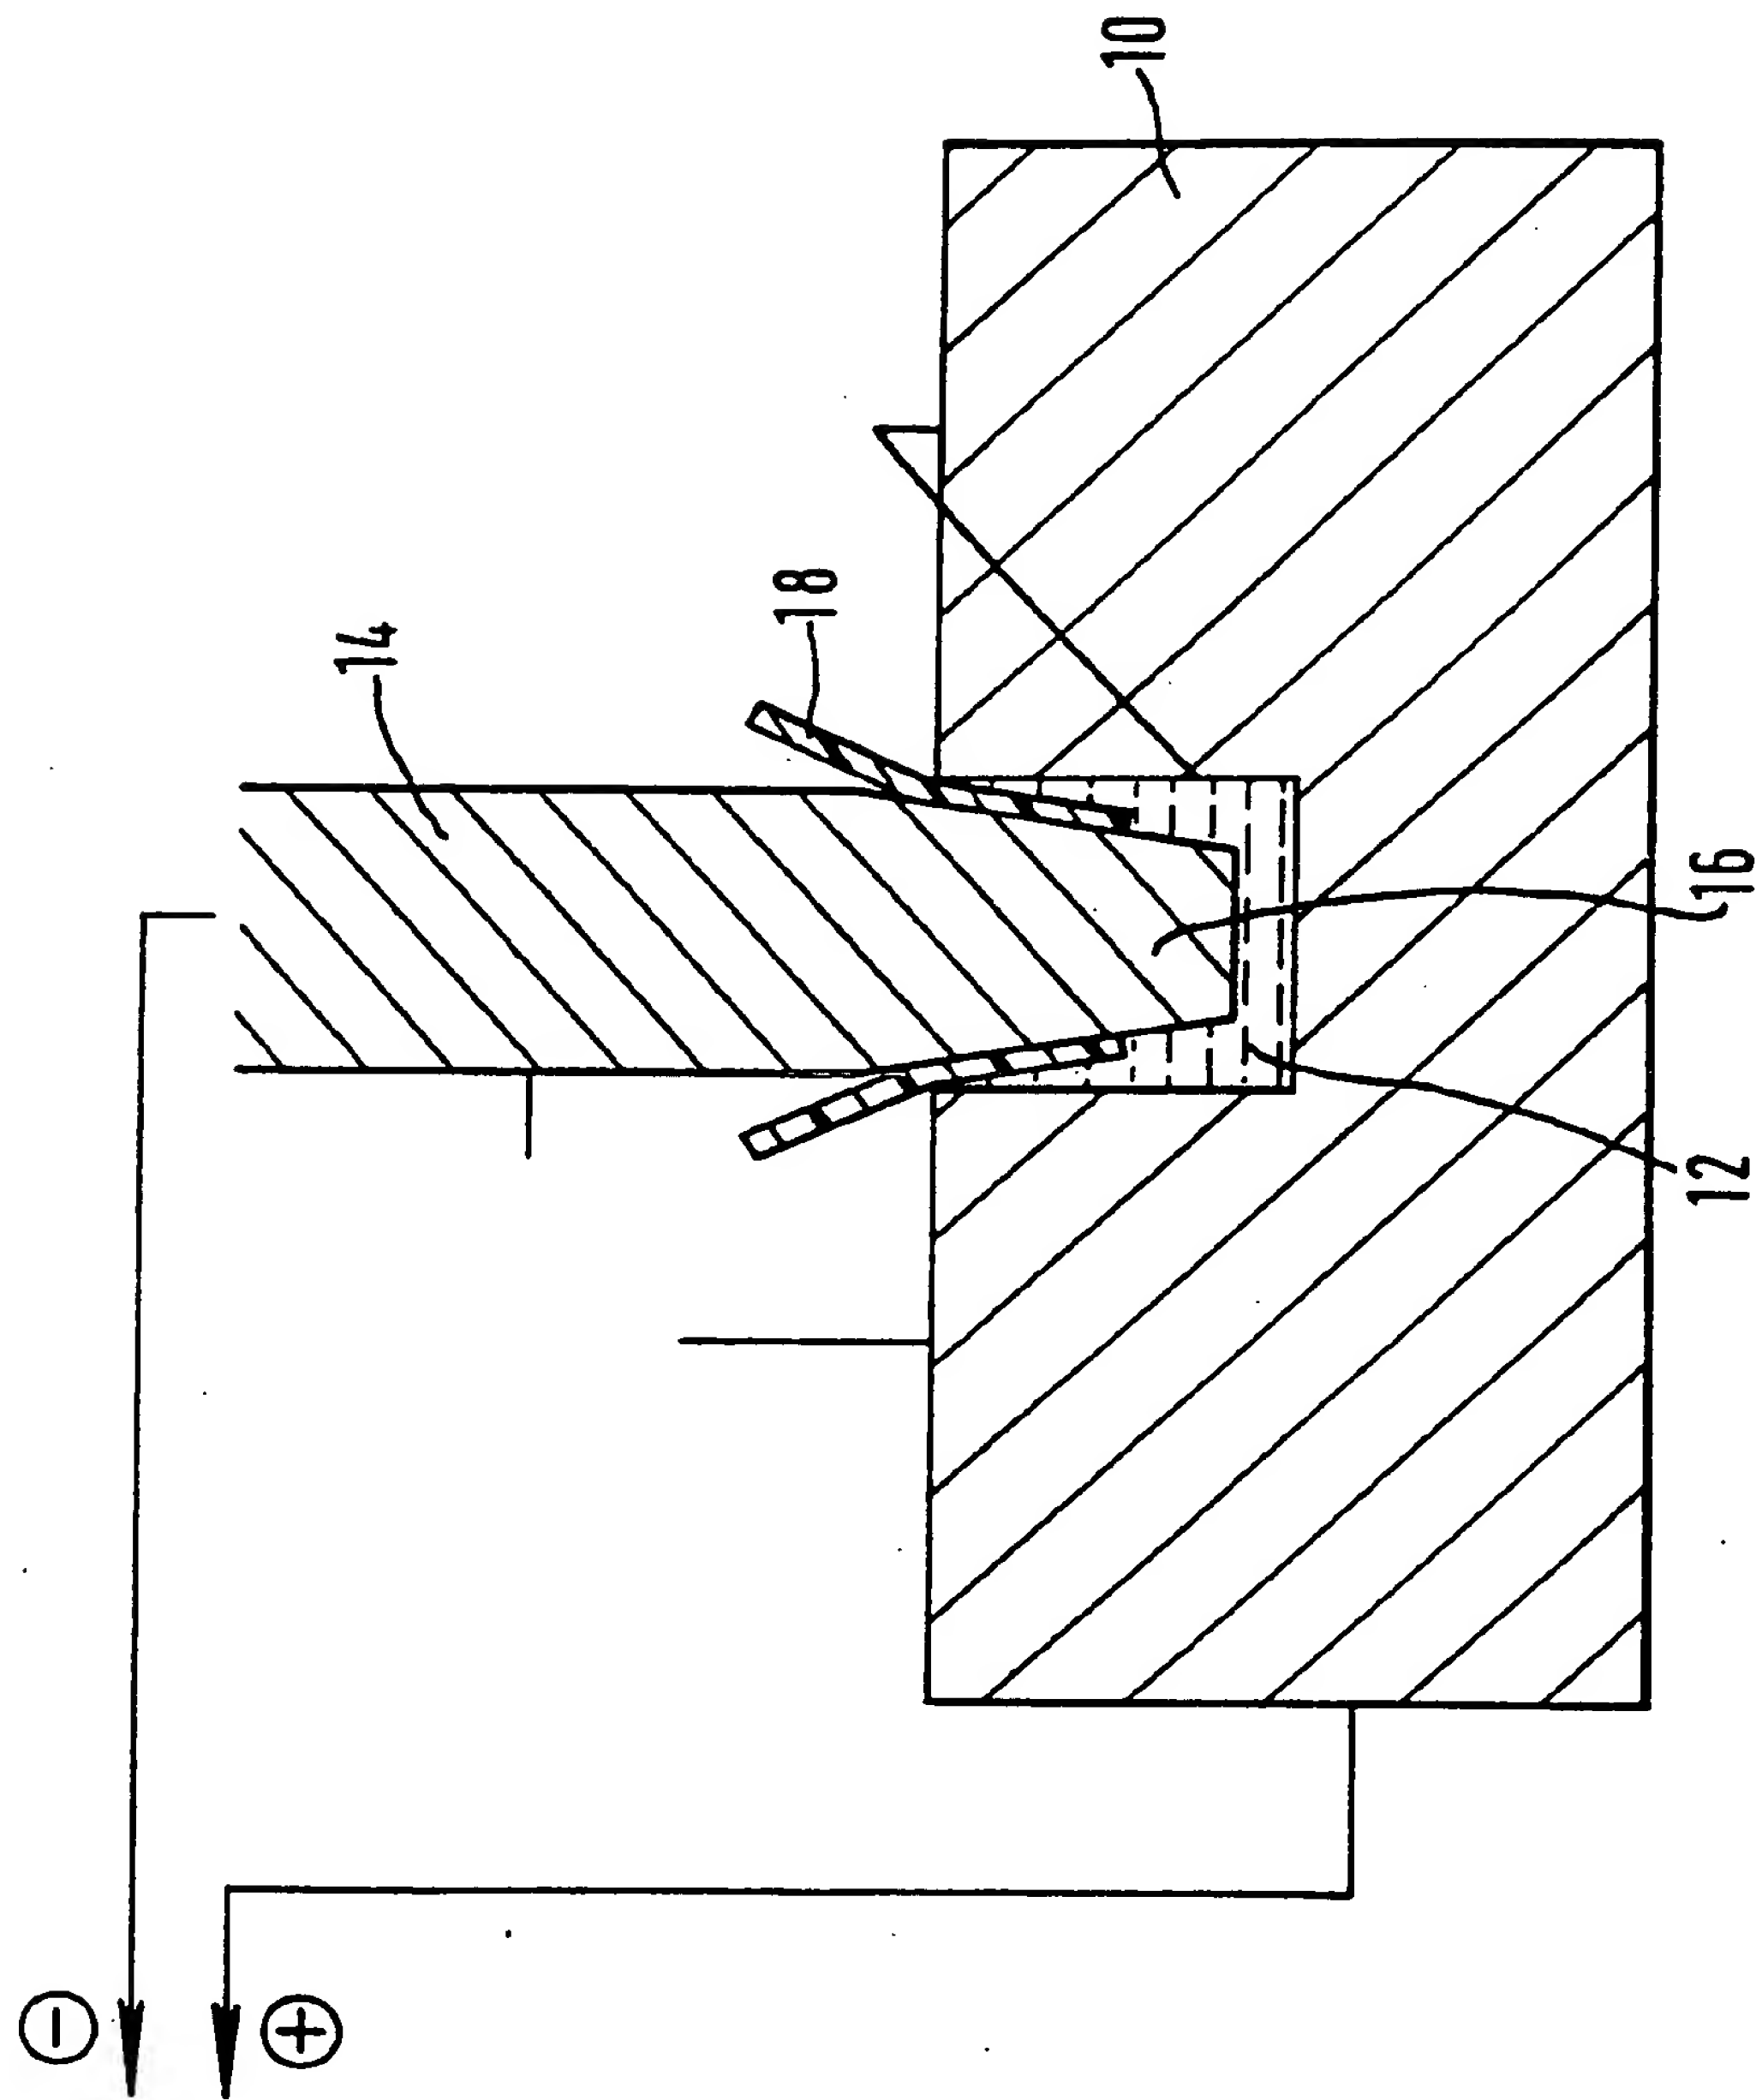

INTERNATIONAL SEARCH REPORT

Inter mal Application No
PCT/GB 95/00542A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 C12Q1/68 C12N15/10

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 C12Q C12N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO,A,92 04470 (SCIENT GENERICS LTD) 19 March 1992 cited in the application the whole document ---	1-20
A	WO,A,93 15224 (SCIENT GENERICS LTD) 5 August 1993 cited in the application the whole document ---	1-20
A	J. IMMUNOL. METHODS, vol. 112, no. 2, 1988 ELSEVIER, AMSTERDAM NL, pages 153-161, C.J. STANLEY ET AL. 'Amperometric enzyme-amplified immunoassays' cited in the application the whole document -----	1-20

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents :

- 'A' document defining the general state of the art which is not considered to be of particular relevance
- 'E' earlier document but published on or after the international filing date
- 'L' document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- 'O' document referring to an oral disclosure, use, exhibition or other means
- 'P' document published prior to the international filing date but later than the priority date claimed

- 'T' later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- 'X' document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- 'Y' document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- '&' document member of the same patent family

Date of the actual completion of the international search

8 June 1995

Date of mailing of the international search report

20.06.95

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Hornig, H

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB 95/00542

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO-A-9204470	19-03-92	GB-A- 2247889 AU-A- 8517391	18-03-92 30-03-92
WO-A-9315224	05-08-93	AU-B- 3362893 CA-A- 2128686 EP-A- 0636185 JP-T- 7503370	01-09-93 05-08-93 01-02-95 13-04-95